## DT 200™

# **Fabric Specification Sheet** Air Porous

#### **FABRIC**

DT  $200^{\text{TM}}$  is a medium weight, commercial grade, microperforated fabric. Developed as our mid-grade polyesterbased fabric.

#### **FEATURES & BENEFITS**

- Provides low velocity dispersion in both vertical and horizontal pattern
- Micro-perforated fabric face
- Industry standard configuration with easy room side install and removal
- Machine washable

#### **FABRIC SPECIFICATIONS**

Weave: Fire Retardant Polyester | Filament, Non-Linting,

Coated, Micro-Perforated

Weight:  $4.8oz/yd^2$  ( $163g/m^2$ )

Porosity: 200 (+/-15) CFM/ft<sup>2</sup> @ 0.5in w.g.

(1049L/s/m<sup>2</sup> @ 125Pa)


Codes: Classified by Underwriters Laboratories in

accordance with the requirements of:

• NFPA 90A • UL 2518



#### SHAPE

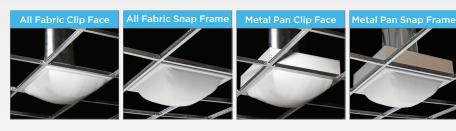

#### **COLOR**




#### **SUSPENSION**



<sup>\*\*</sup>See full warranty sheet for application and airflow requirements\*\*

### AIR DISPERSION





Phone: 563-588-5300 Toll-free: 866-382-8769 ductsox.com

